

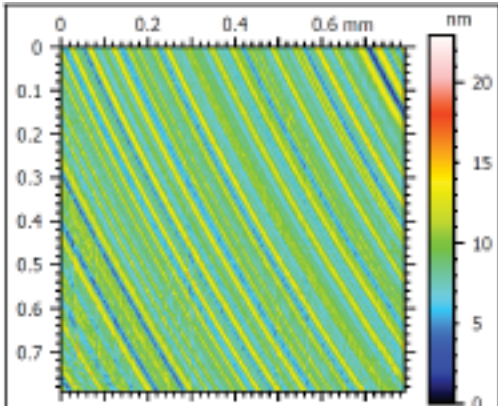


Calcium Fluoride

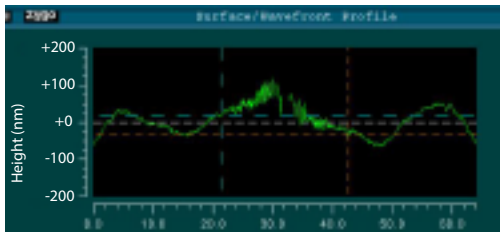

20 Å RMS

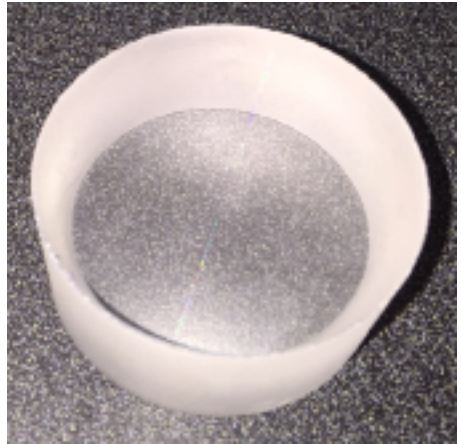

ϕ50 mm 0.5 fr P-V

- Faster part machining (3-5x)
- Improved surface finish (2-4x)
- Extended tool life (6-8x)
- Improved form accuracy with correction
- No visible pitting or spoking
- Allows use of low grade material