


# Zinc Sulfide

Conventional

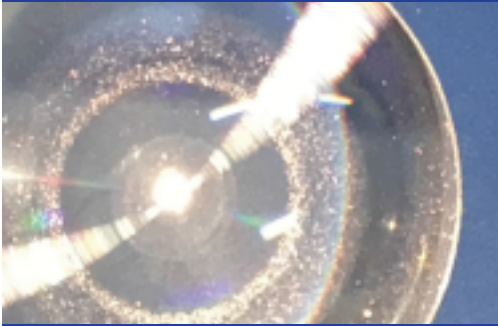


45 Å RMS

Micro-LAM



15 Å RMS

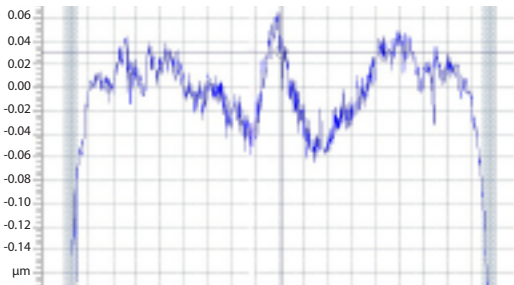

φ90 mm 0.5 fr P-V

- Faster part machining (2-5x)
- Improved surface finish (2-4x)
- Extended tool life (2-4x)
- Improved form accuracy with correction
- No haze or pitting